


# "SENTINEL"™ Ground Mount Flexible Delineator TD5600 Series

One Piece - Reboundable - Driveable

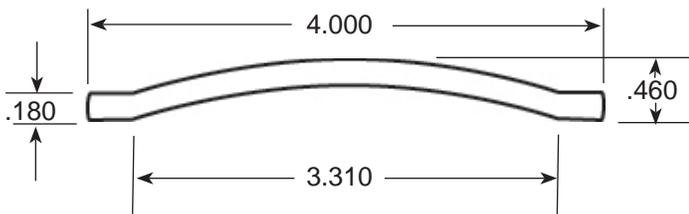

## TW-400 Sentinel

Ideal for marking highways, on/off ramps, curves, intersections, or other high impact areas with repeated high speed vehicle and tire impacts and return to its original position.

The TW-400 is manufactured using high-quality, recycled materials with impact modifiers and UV protection that combine to make the most resilient, durable, high visibility posts on the market today.

Due to their superior flexibility, the Sentinel markers may require a pilot hole in compacted soil conditions before installation with industry standard post drivers.

The posts are designed for dual sided application of reflective sheeting, decals, numbers or letters for use as guideposts, hazard, boundry, utility, trail or message markers. Order posts in various colors and lengths.

The Sentinel posts come with an optional 18" galvanized steel U-Channel soil anchor that can be driven into compacted soils without requiring pilot holes.

An optional soil anchor barb is designed for anchoring permanently in loose, sandy or wet soil conditions. While driving the posts into the ground, the soil barb allows easy penetration during installation, but unfolds, grabbing the surrounding soil to prohibit "pull-out" in poor soil applications.

Technical Specifications:

Product Name: SENTINEL - Drivable Delineator


TD 5600 Series TW-400

"X" Dimensions: 48", 62", 66", 72", 78" and 84" are common standard lengths.

Post Material: 100% Post Consumer Recycled Polycarbonate Plastic - UV Stabilized and Impact Modified

Sheeting: 3" Wide. Dimension "Y" Lengths of 6", 8", 10" or 12" are available.

All sheeting meets ASTM 4956.01 Standards

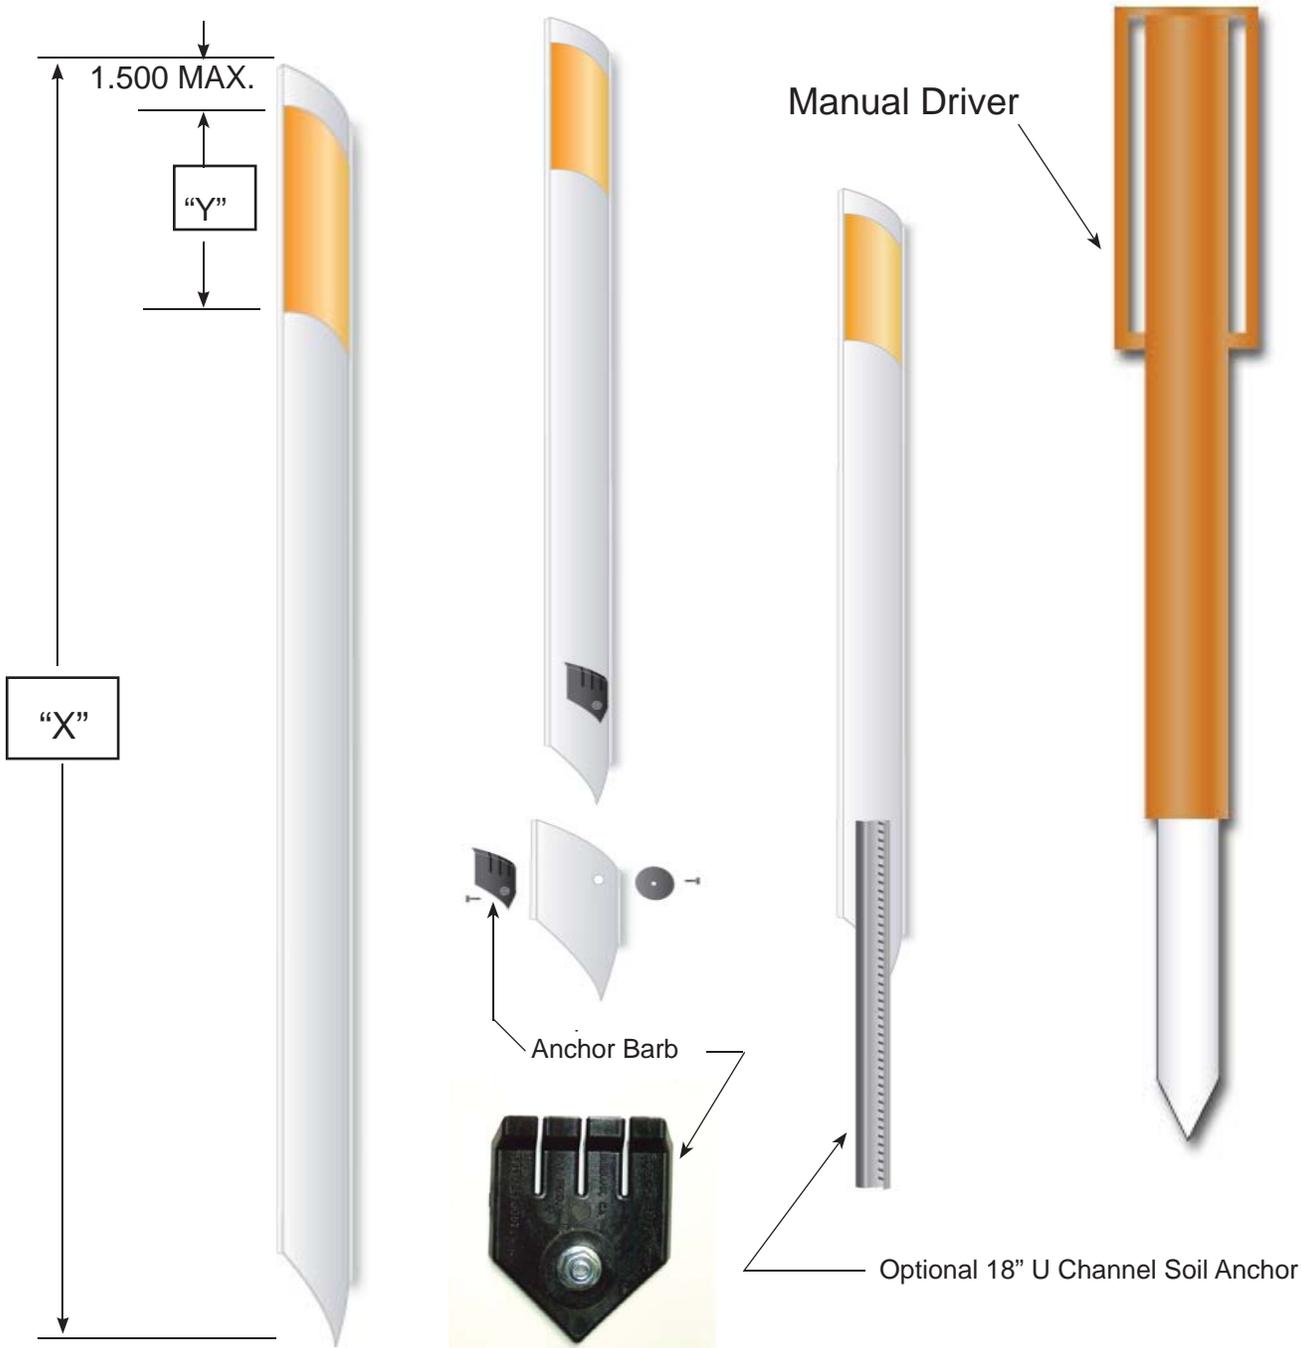

The measurements provided are intended as a source of information. They are given without guarantee and are not classified as a warranty. A specification will be sent to you upon request.

Three D Traffic Works 430 N. Varney St. Burbank, CA 91502 T:877.843.9757 F:818.841.5096 [www.trafficwks.com](http://www.trafficwks.com)