



INTRODUCING THE NEW TOUGH-EZ TILES



ADA COMPLIANT WARNING TILES
PROVIDE A PHYSICAL WARNING TO
VISUALLY IMPAIRED PEDESTRIANS



MANUFACTURER'S GUARANTEE

Three D Traffic Works guarantees to the buyer that the Surface Applied DWT Tough-EZ Tactile Warning Tiles shall be guaranteed for a period of five (5) years from date of final installation. The guarantee includes replacement of tiles when there is a defect in the dome shape, color fastness, sound-on-cane acoustic quality, resilience or attachment. The units are of uniform kind, quality, and quantity within each unit and among all units. This guarantee is in lieu of any warranty, expressed or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose, and of any other obligation or liability on the part of Three D Traffic Works. Under no circumstances will Three D Traffic Works be liable for any loss, damage, expense or consequential damages of any kind arising in connection with the use or ability to use Three D Traffic Works products.

United States Patent # 8,439,596 B1
Other Patents Pending



430 North Varney Street, Burbank, CA 91502
Toll Free: 877 843-9757 Fax: 818 841-5096
www.trafficwks.com email: sales@trafficwks.com

Offering the fastest and absolute easiest solutions for engineers, architects, and public works agencies to make their existing curbs ADA Compliant- Since '06



Check out our web site for our full line of traffic safety products made from recycled materials

For more information go to our web site: www.trafficwks.com



DWT TOUGH-EZ TILES

Equipped with a pressure sensitive adhesive backing, the Tough-EZ Tile is the quickest and easiest installed surface mount on the market!

The DWT Tough-EZ tile can be applied to both existing asphalt and concrete surfaces. For installation, simply grind and clean the surface, apply primer to the cleaned surface (allow 3 minutes to cure), then "peel and stick" the tile into place. Because this application relies on pressure sensitive adhesive, you must apply pressure on and between the truncated domes of the tile. To finish, run a bead of adhesive/sealant around tile perimeter to complete the installation.



INSTALLATION INSTRUCTIONS



1. OUTLINE LOCATION OF TILE ON SURFACE



2. GRIND SURFACE



3. CLEAN WITH BROOM OR BLOWER



4. APPLY PRIMER



5. REMOVE PAPER BACKING



6. SET TILE IN PLACE



7. APPLY EVEN PRESSURE



8. APPLY PERIMETER SEAL

Do not apply primer OR cut tile (Saw, grind, sand) without the use of a NIOSH approved cartridge respirator suitable to keep airborne mists and vapor concentrations below the time weighted threshold limit values. When using in poorly ventilated and confined spaces, use fresh-air supplying respirator or a self contained breathing apparatus.




DWT PRESSURE ROLLER

The DWT Pressure Roller is used to apply pressure to the top of the tile domes as well as in between. Applying even pressure insures a good installation for the Tough-EZ surface mount tiles.

DWT SPECIFICATIONS

Pressure Sensitive Adhesive Backing .045" thick

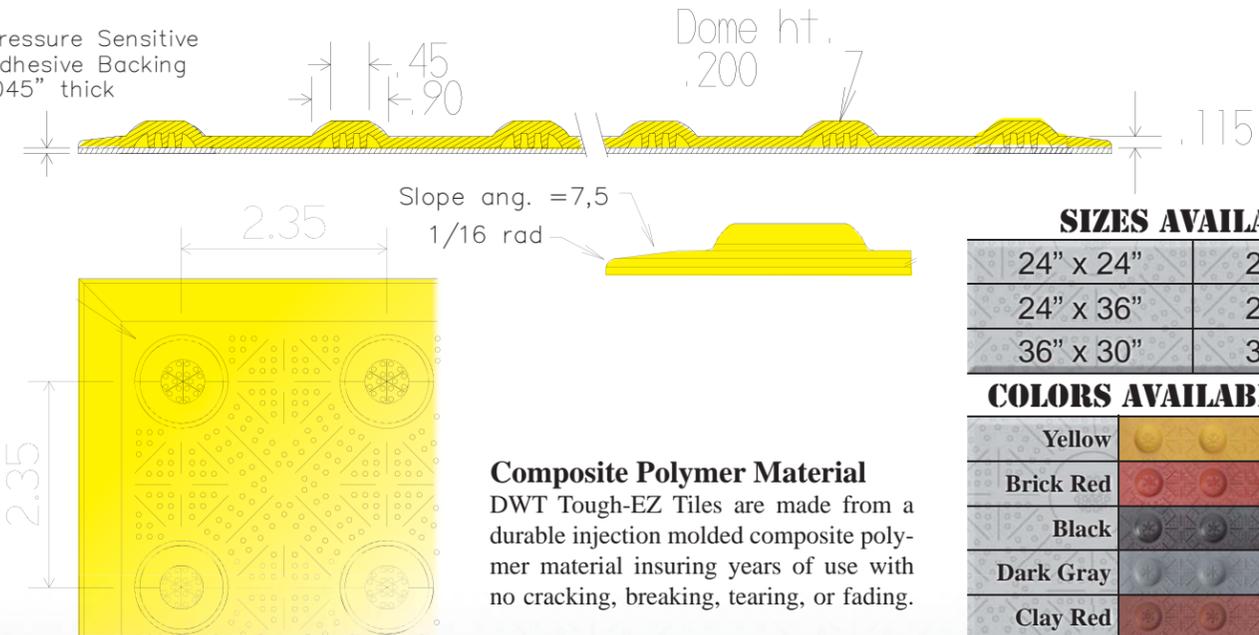

SIZES AVAILABLE

24" x 24"	24" x 48"
24" x 36"	24" x 60"
36" x 30"	36" x 48"

COLORS AVAILABLE FEDERAL

Yellow		33538
Brick Red		22144
Black		17038
Dark Gray		36118
Clay Red		20109
Blue		15187

Custom colors available as a special order with a minimum quantity of 200 units

Composite Polymer Material

DWT Tough-EZ Tiles are made from a durable injection molded composite polymer material insuring years of use with no cracking, breaking, tearing, or fading.

High Visibility Color

DWT color is homogenous throughout the tile and is available in six colors that conform to ADAAG specifications for color contrast.

