

“ K-2 MARKER”


Ground Mount - Reboundable - Object Marker

Model #: TD5515

Durable Marking of Median Islands

MUTCD Code : OM2-1V & OM2-2V Object Marker

- Designed to mark obstructions near or within a roadway. Typical uses include marking of islands, curbs or neutral areas.
- The impact-resistant Earthflex elastomer hinge is designed to withstand the extremes of heat or cold and will not crack or split.
- Easily installed using standard tools.
- Highly reboundable Earthflex hinge transfers the stress from impacts to the hinge, giving much longer service life to the HDPE post
- Soil Anchor options: 2” perforated square steel post or 2.5” OD galvanized round steel anchor with a closed end.
- Non-mechanical hinge design means no steel belt, no bungee cord or any other moving parts to break.
- Easy post replacement to minimize worker exposure in the work zone.
- Earthflex hinge is designed to be impacted from any direction. All 360 degrees!
- PSST Soil Anchors are available in either 18 inch or 24 inch lengths.

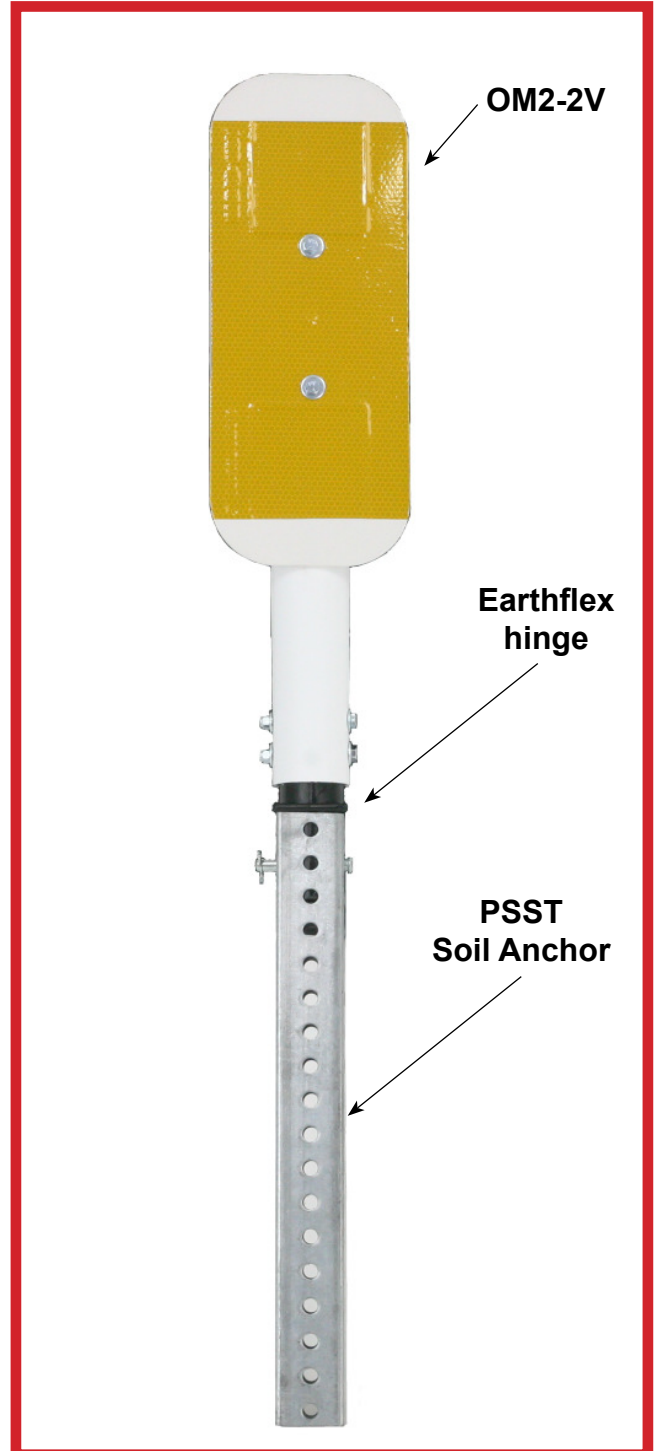

we got the works!!
Three D TrafficWORKS
Innovative Traffic Safety Products

430 North Varney Street Burbank, CA. 91502

T: 877.843.9757 F: 818.841.5096

website: www.trafficwks.com Email: sales@trafficwks.com





TD5515 "K-2 MARKER"
Reboundable Ground Mount Object Maker
MUTCD Code : OM2-2V & OM2-1V

Yellow Retroreflective sheeting complies with ASTM 4956.19.

All Fasteners are Type BB 1/4-20 Hex Head Screws and Nuts with Zinc Plating.


Fasteners commonly used with PSST Soil Anchor are ordered separately.



Post and Plate Material: Impact modified and UV resistant polymers from 100% Post-Consumer Recycled sources.

Roadway Surface.

Soil Anchor to be driven within 1 - inch of the top of the anchor so that the top of the sheeting is 21 inches above roadway surface.

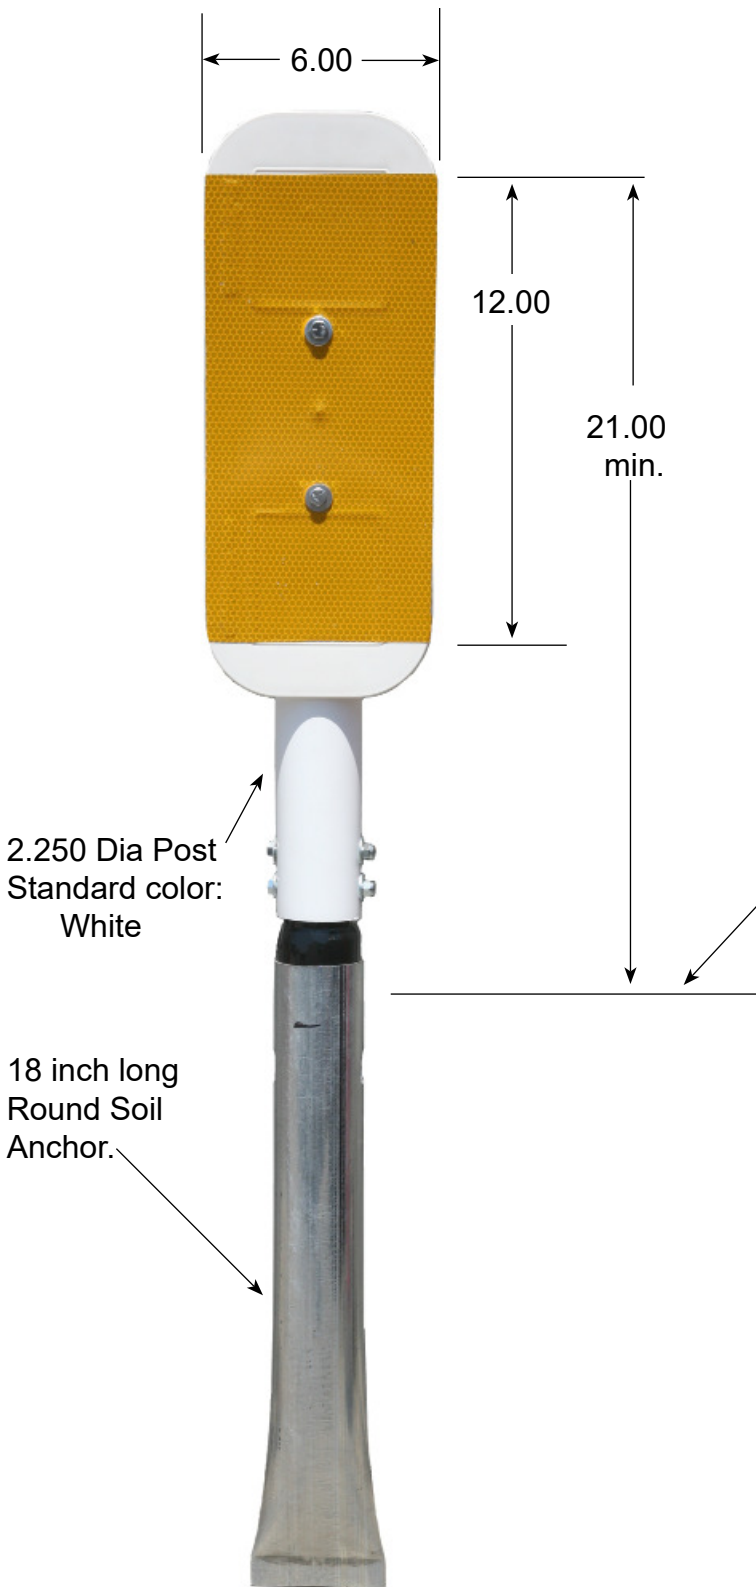

OM2-1V available.
 3 - 3 X 3 inch reflector squares.