

WORKS BARRICADE

TYPE III WOOD & PSST BARRICADE

TD2550 MODEL

CERTIFIED TO MEET THE CRASHWORTHY
REQUIREMENTS OF NCHRP-350



NCHRP350 Compliant : WZ-85 & WZ-54
MUTCD Compliant
MASH Compliant Category 1 Device

- Barricade models 8 feet wide and greater can include an optional stabilizer bar between uprights for increased stability and an optional anti-rotational fitting.
- Rubber Base is made from 100% Post-Consumer Recycled Rubber. Easily assembled or removed for storage.
- Type III barricades can be purchased as assembled units or component parts. Legs and boards can be purchased separately. All TD2550 barricade components are interchangeable.
- TD2550 Type III Works Barricade is available using Unistrut's Telespar tubing for the uprights and detachable feet. Easily detaches for transportation, assembly and storage. Also available with a 35 lb rubber base that provides tremendous stability and slip resistance.



we got the works!!
Three D
TrafficWORKS
Innovative Traffic Safety Products




430 North Varney Street, Burbank CA 91502 Tel: (877) 843-9757 Fax: (818) 841-5096

Email: sales@trafficwks.com Website: www.trafficwks.com




TD2550 MODEL WORKS TYPE III WOOD & PSST BARRICADE SPECIFICATIONS

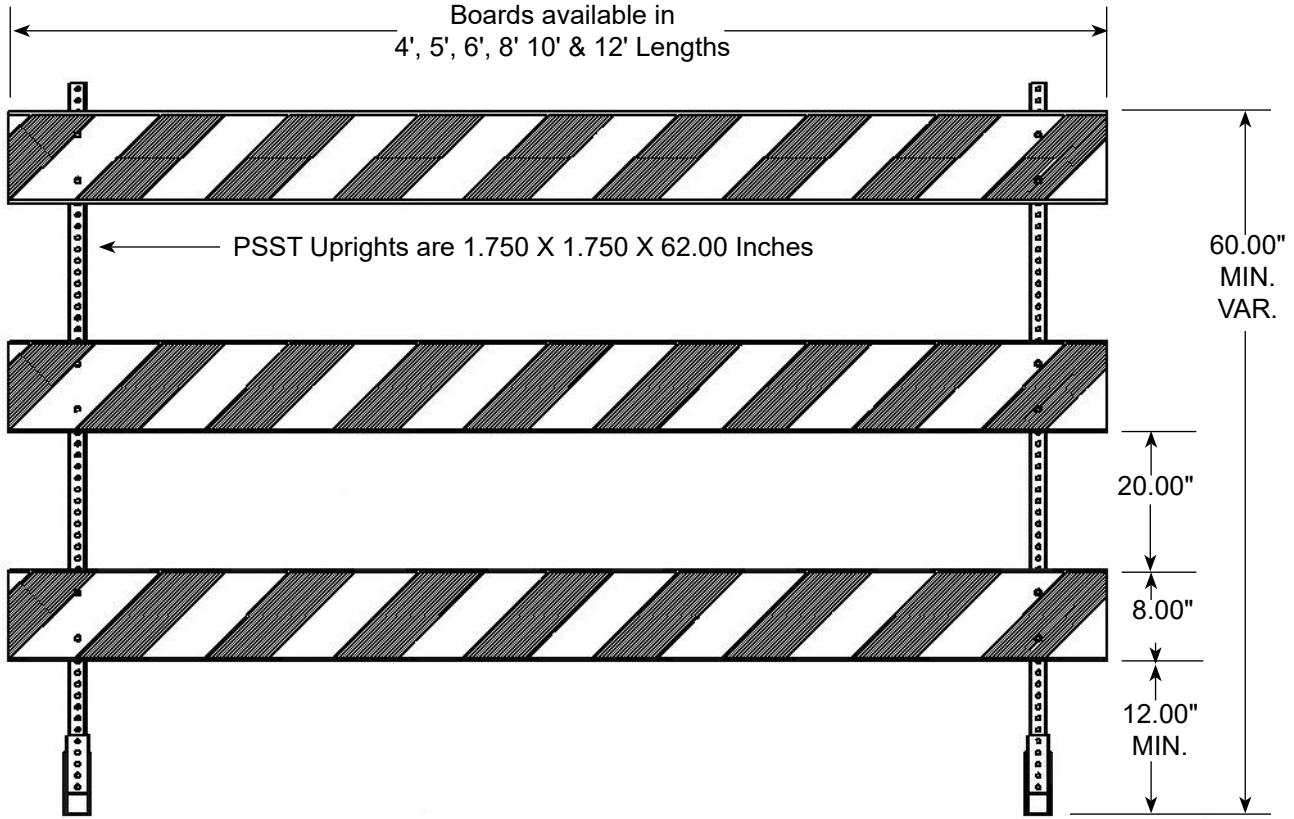

- 3/4" Plywood boards are painted white and can accommodate reflective sheeting on both sides of boards.
- PSST uprights are available in 14 gauge steel. 14 gauge weight: 13.2 lbs.
- Panels available with Chevron, Left or Right Hand Sheeting. Divergent Striping or Same Direction Sheeting. All sheeting is ASTM 4956 compliant.
- In high wind areas please use sand bags.

TD8400 Base Slip-Resistant and Stable !!!
 Weight: 35 lbs.
 Height: 4 inches

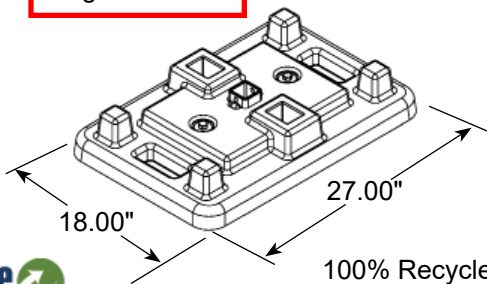

PSST Base with Welded Socket
 14 gauge weight: 10.8 lbs.

