

# **WORKS BARRICADE**

## **TYPE III PLASTIC & PSST BARRICADE**

### **TD2650 MODEL**

CERTIFIED TO MEET THE CRASHWORTHY  
REQUIREMENTS OF NCHRP-350



NCHRP350 Compliant : WZ-85 & WZ-128  
MASH Category I Compliant Device  
MUTCD Compliant

- Type III barricades can be purchased as assembled units or component parts. Legs and boards can be purchased separately. All TD2650 barricade components are interchangeable.
- Barricade models 8 feet wide and greater can include an optional stabilizer bar between uprights for increased stability and an optional anti-rotation fitting.
- Rubber Base is made from 100% Post-Consumer Recycled Rubber. Easily assembled or removed for storage. Slip resistant and stable!



PSST Base with  
Welded Socket



*we got the works!!*  
**Three D TrafficWORKS**  
Innovative Traffic Safety Products




430 North Varney Street, Burbank CA 91502 Tel: (877) 843-9757 Fax: (818) 841-5096

Email: [sales@trafficwks.com](mailto:sales@trafficwks.com) Website: [www.trafficwks.com](http://www.trafficwks.com)




## TD2650 MODEL WORKS TYPE III PLASTIC BARRICADE SPECIFICATIONS

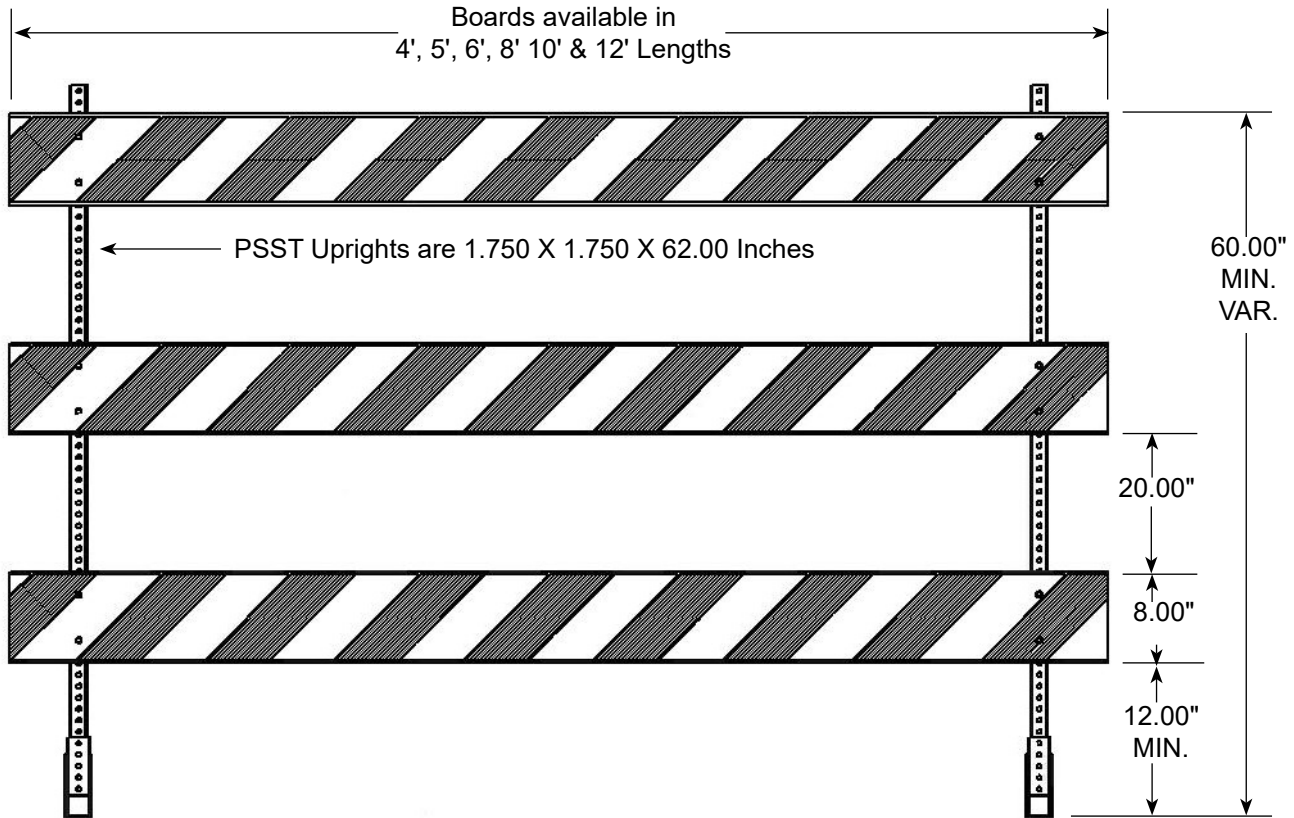

- HDPE Plastic boards can accommodate reflective sheeting on both sides of boards. 90% Recycled Content!!!
- Available with 1"x8" and 2"x8" White extruded boards. See TD4000 for additional information.
- PSST uprights are available in 14 gauge steel. 14 gauge uprights weigh 9 lbs.
- Panels available with Chevron, Left or Right Hand Sheeting, Divergent Striping or Same Direction Sheeting. All sheeting is ASTM 4956 compliant.
- In high wind areas please use sand bags.
- Fasteners are Zinc-Plated steel.

TD8400 Base  
Weight: 35 lbs.  
Height: 4 inches

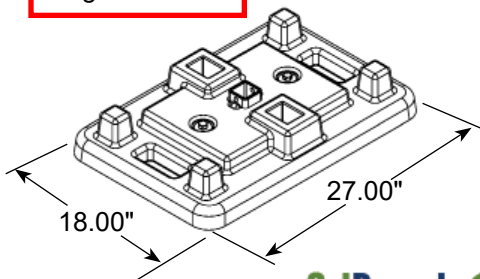

PSST Base with Welded Socket  
14 gauge weight: 10.8 lbs.

