

# **EARTHFLEX™**

## **FLEXIBLE GROUND MOUNT DELINEATOR SYSTEM**


### **TD5500 MODEL**

**CalTrans Approved Class 1 Driveable Delineator**



#### **FEATURES:**

- The most flexible, durable, impact resistant marker designed to withstand multiple impacts and return to its upright position.
- Earthflex is designed to be impacted from any direction. All 360 degrees!
- Soil Anchor options: 2" perforated square steel post or 2.5" OD galvanized round steel with open or closed end styles.
- Non-mechanical design: No steel belt, no bungee cord or any moving parts.
- Easy post replacement to minimize worker exposure in the work zone.
- 100% Post-Consumer Recycled Materials.

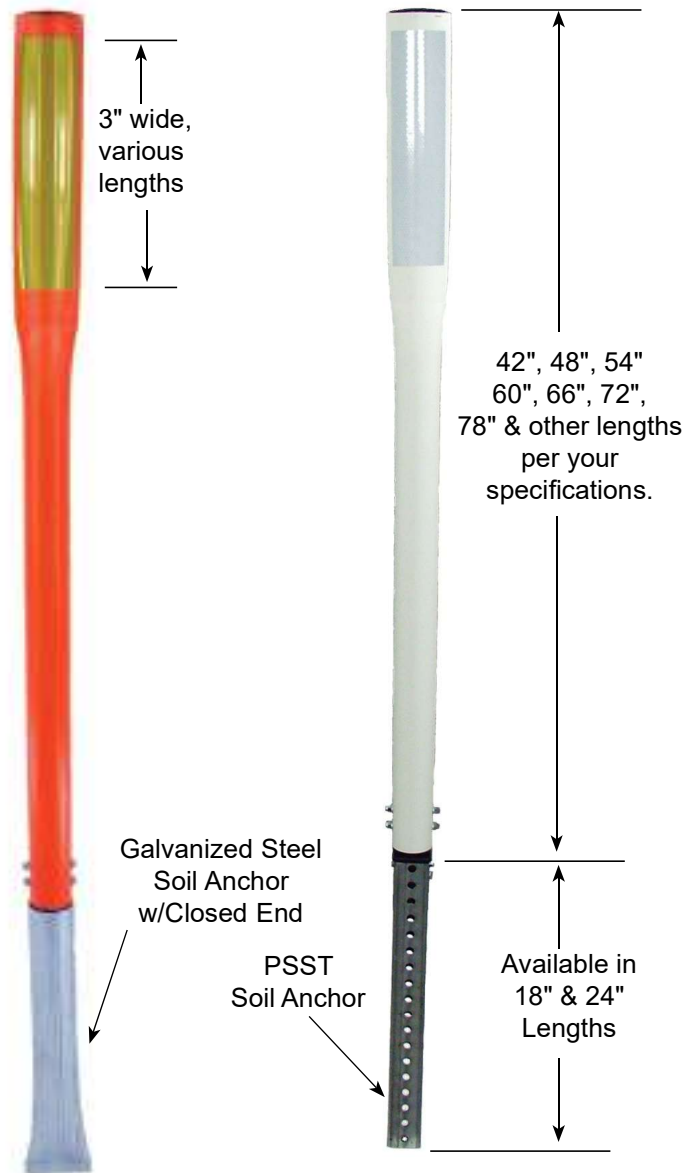

*we got the works!!*  
**Three D TrafficWORKS**  
**Innovative Traffic Safety Products**



430 N. Varney Street, Burbank CA 91502 Tel: 877-843-8757 Fax: 818-841-5096  
Email: [sales@trafficwks.com](mailto:sales@trafficwks.com) Website: [www.trafficwks.com](http://www.trafficwks.com)




**TD5500 MODEL**  
**TWO PIECE FLEXIBLE GROUND MOUNT DELINEATOR**  
**SPECIFICATIONS**



The TD5500 Earthflex™ posts are currently available in white, orange and yellow. Three D Traffic Works can manufacture this product to your desired color.

**MANUAL DRIVING TOOL**  
Available upon request



- Post Length: 42" to 78" or to your specifications.  
Post Shapes: 2.250" Round, 3.000" Round and 3.000" Flat.  
Post Material : Impact modified and UV resistant recycled polymer from 100% Post-Consumer Recycled HDPE.
- Sheeting sizes to your specifications.  
All sheeting complies with ASTM 4956 standards.
- Galvanized Steel Soil Anchors are 2.500 OD and are available in 8", 12", 14" and 18" Lengths, either open or closed end styles.
- Galvanized PSST Anchors are available in 2.000 square size and in 18" and 24" lengths or special order custom lengths.

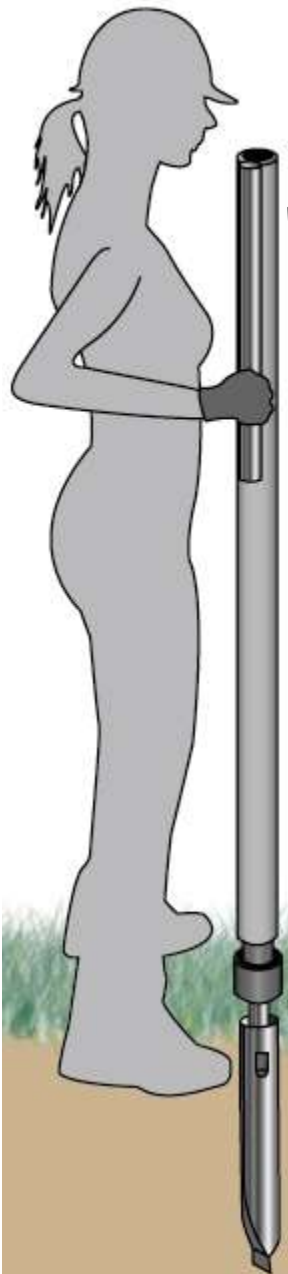

The Earthflex "S" hinge is available in 2.000 square size..

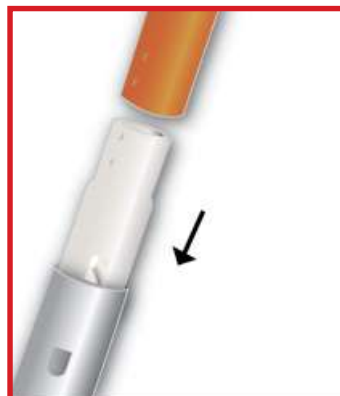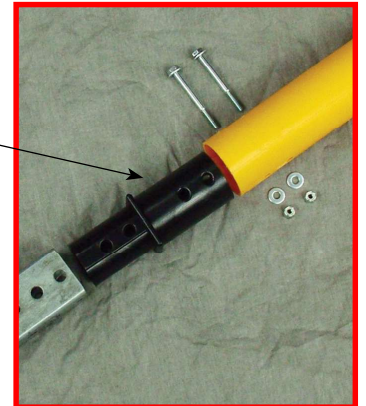

Reduced installation and maintenance costs!  
No tools required to insert the Earthflex post and hinge into either the PSST soil anchor or the galvanized soil anchor.

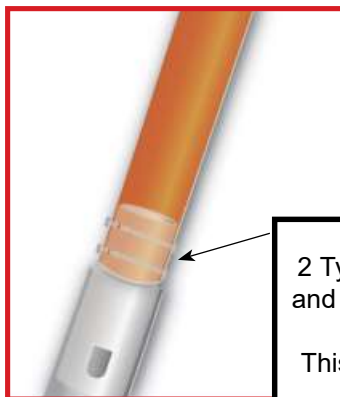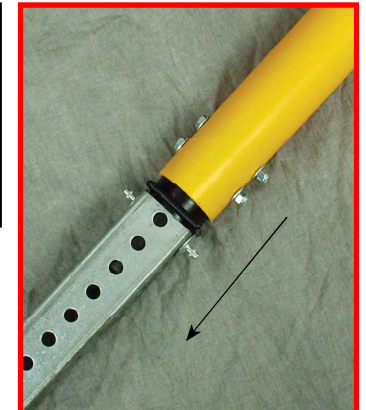

Fasteners commonly used for Earthflex PSST Anchors are ordered separately.

Post Fasteners:  
2 Type BB 1/4" Bolts with Hex Head and 2 Nyloc Lock Nuts with Washers.  
All hardware is Zinc Plated  
This kit is standard with each order.

