

# “ K-1 MARKER”


*Ground Mount - Reboundable - Object Marker*

**Model #: TD5515**

**Durable Marking of Median Islands**

## **MUTCD Code : OM2-1H & OM2-2H Object Marker**

- Designed to mark obstructions near or within a roadway. Typical uses include marking of islands, curbs or neutral areas.
- The impact-resistant Earthflex elastomer hinge is designed to withstand the extremes of heat or cold and will not crack or split.
- Easily installed using standard tools.
- Highly reboundable Earthflex hinge transfers the stress from impacts to the hinge, giving much longer service life to the HDPE post
- Soil Anchor options: 2” perforated square steel post or 2.5” OD galvanized round steel anchor with a closed end.
- Non-mechanical hinge design means no steel belt, no bungee cord or any other moving parts to break.
- Easy post replacement to minimize worker exposure in the work zone.
- Earthflex hinge is designed to be impacted from any direction. All 360 degrees!
- PSST Soil Anchors are available in either 18 inch or 24 inch lengths.

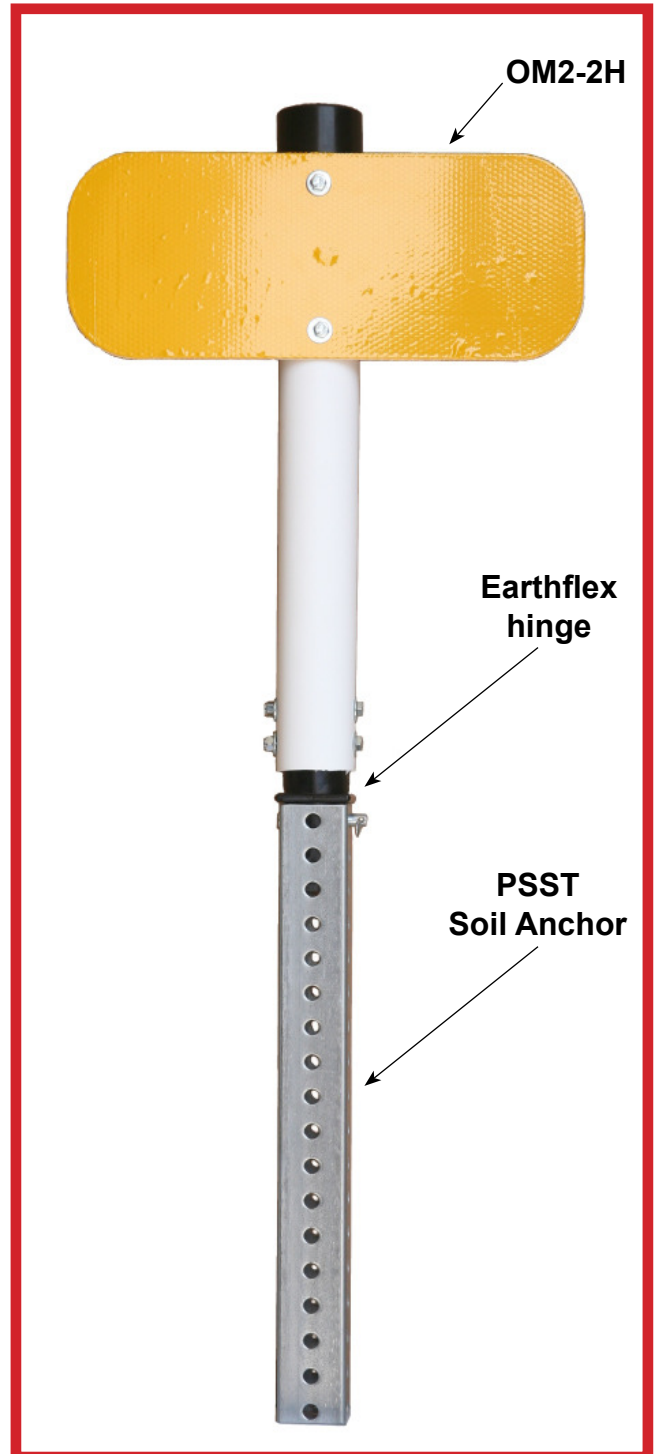

*we got the works!!*  
**Three D TrafficWORKS**  
Innovative Traffic Safety Products

430 North Varney Street Burbank, CA. 91502

T: 877.843.9757 F: 818.841.5096

website: [www.trafficwks.com](http://www.trafficwks.com) Email: [sales@trafficwks.com](mailto:sales@trafficwks.com)






**TD5515 "K-1 MARKER"**  
**Reboundable Ground Mount Object Maker**  
**MUTCD Code : OM2-2H & OM2-1H**

Yellow Retroreflective sheeting complies with ASTM 4956.19.

All Fasteners are Type BB 1/4-20 Hex Head Screws and Nuts with Zinc Plating.

Post and Plate Material: Impact modified and UV resistant polymers from 100% Post-Consumer Recycled sources.

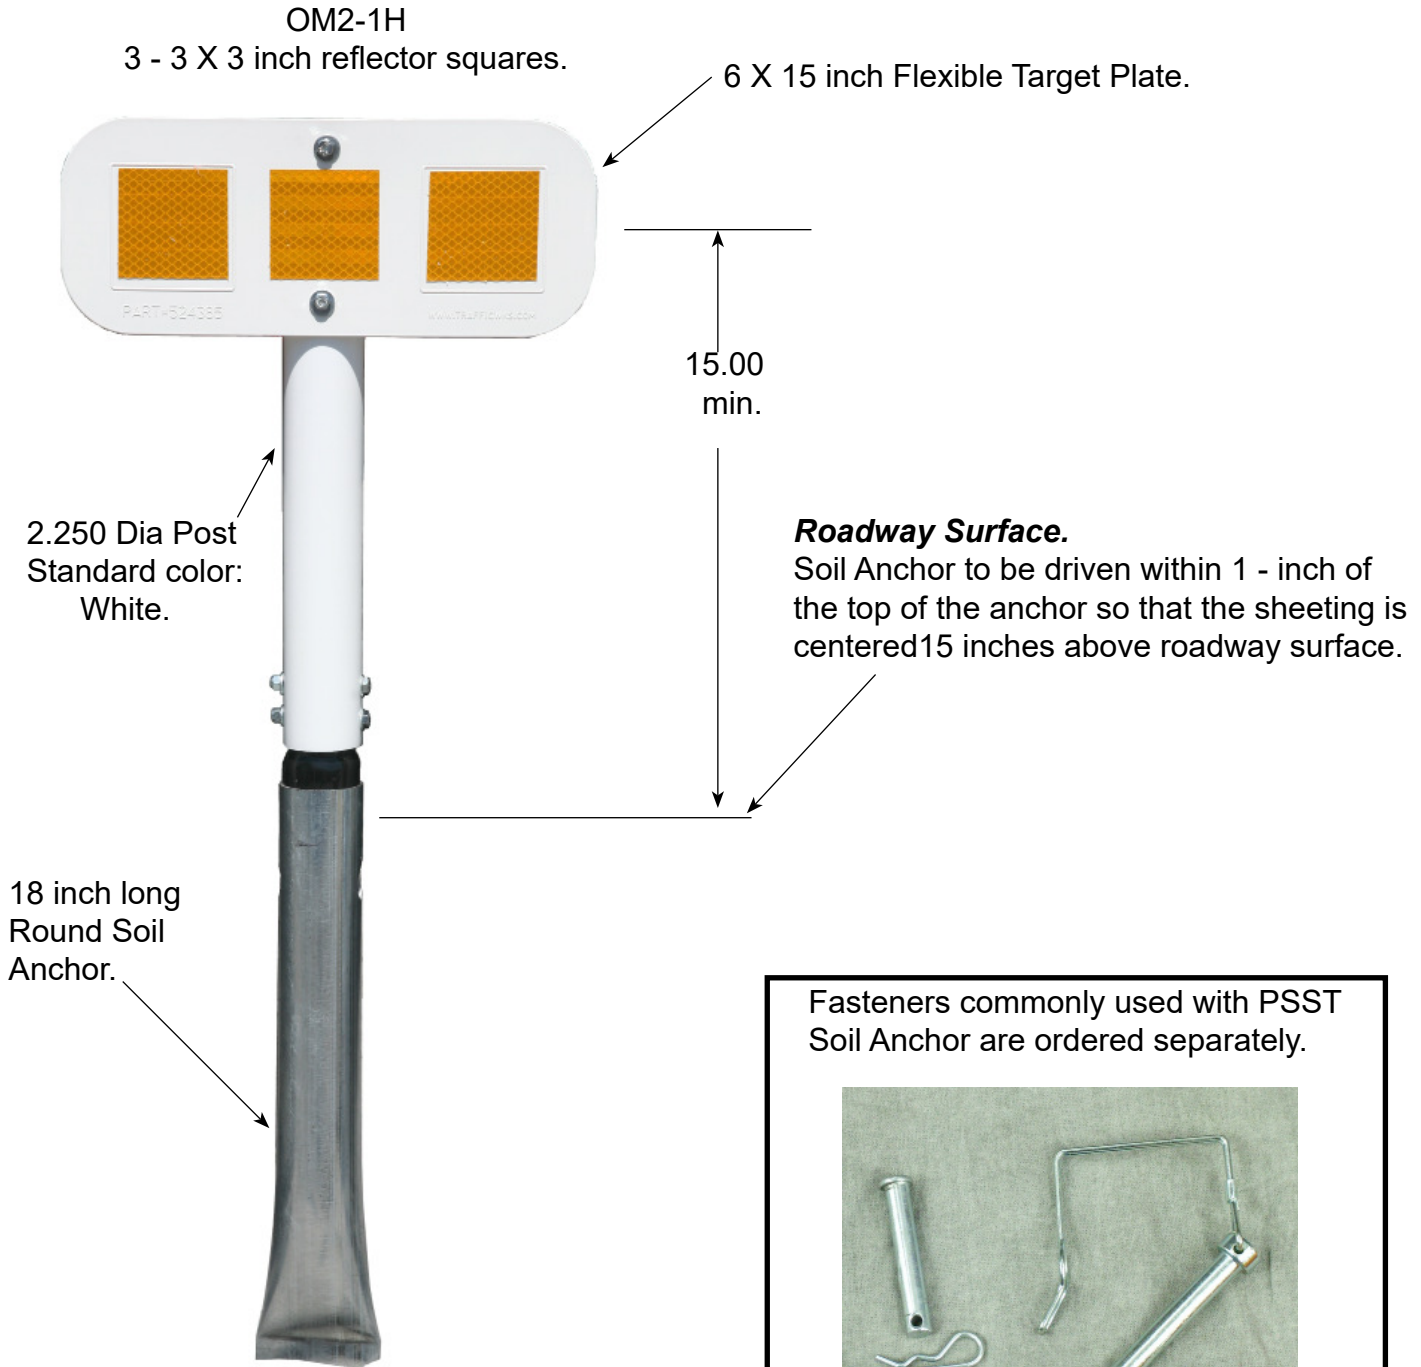

Fasteners commonly used with PSST Soil Anchor are ordered separately.